



鋁合金架高活動地板

ALUMINUM RAISED ACCESS FLOOR SYSTEMS

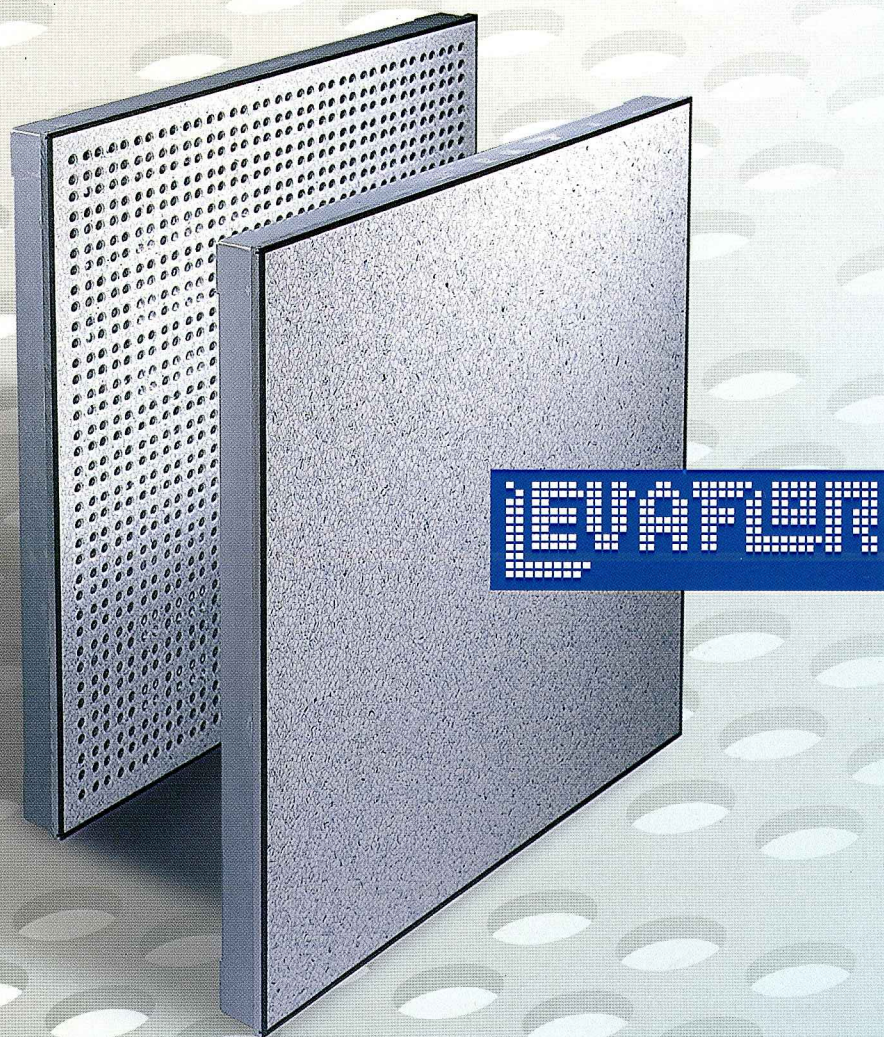

銀田金屬企業股份有限公司
LEVAFLOR INC.

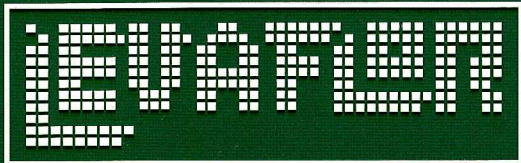

銀田公司簡介

銀田金屬企業股份有限公司成立於1983年5月，秉持專業、誠信、品質及服務等理念正派經營。除自行生產鋁合金高架活動地板系統之外，並代理國際知名品牌產品。

日本

松下電工株式會社—**Panasonic** 合金鋼高架活動地板系統

韓國

ESDWORK Co., Ltd. — 塑膠導電地磚

銀田除在國內擁有傲人的工程實績外，並有多年外銷中東，亞洲各國，產品品質頗獲市場肯定。

本公司擁有之專利發明

台灣

專利字號 87155 164515

專利字號 87432 177120

專利字號 125897 162604

專利字號 125614

美國專利字號：5791096號

日本登錄第 3047054號

中國大陸

專利號 ZL972 21325.2 ZL00245318.5

專利號 ZL972 21324.4 ZL01259759.7

專利號 ZL972 21323.6 ZL00245319.3



Company Profile

Levaflor Inc. was established in May 1983 and is uprightly run with management philosophy of Profession, Trust, Quality and Service. We not only manufacture aluminum raised floor system ourselves but also distribute well known international brand as follows.

Japan



Matsushita Electric Works Ltd.

—Panasonic Steel Access Floor System

Korea


ESDWORK Co., Ltd.

—PVC Conductive Tile

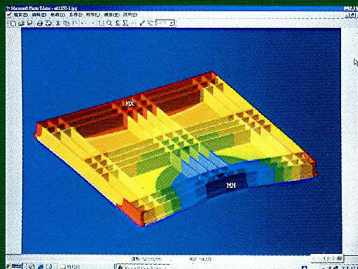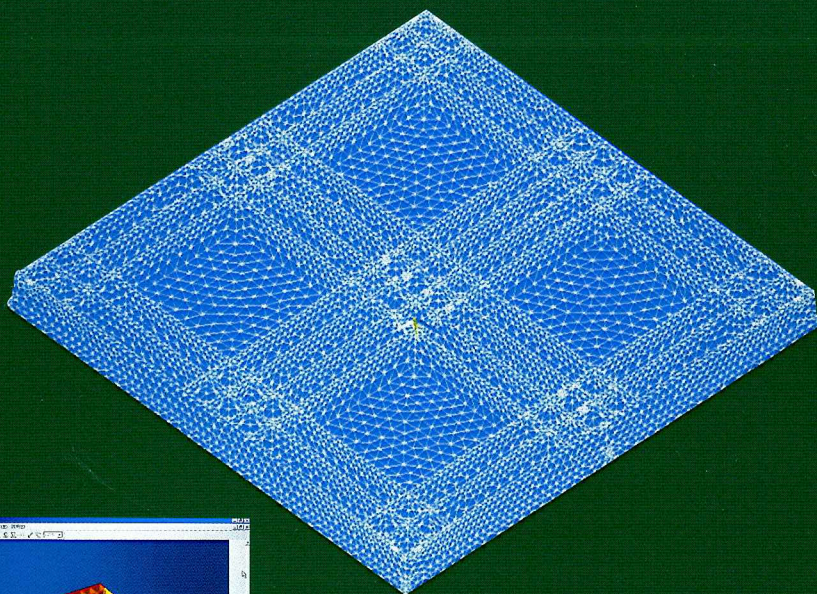


We have already 20 years' experience in the raised floor field and also won fair praise in the market so that our job sites can be found all over Taiwan. Besides, we have many years' experiences of exporting so as to be able to meet the various requirements from foreign customers such as delivery time and quality.


Aluminum Panel Perforated panel Grating panel

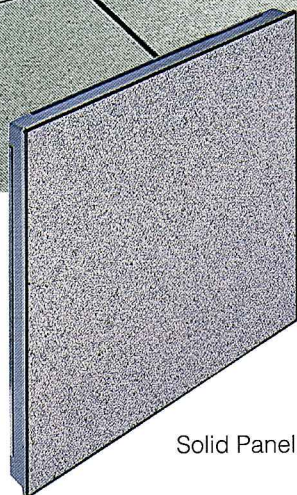

Solid Panel

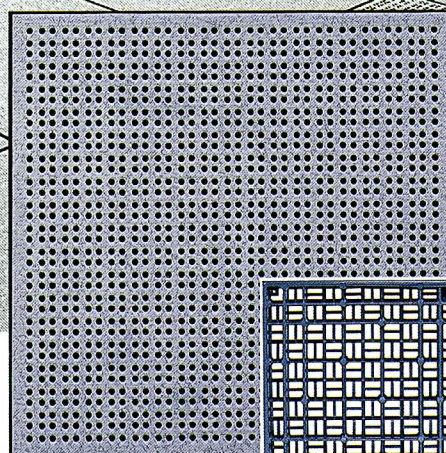

Perforated Panel

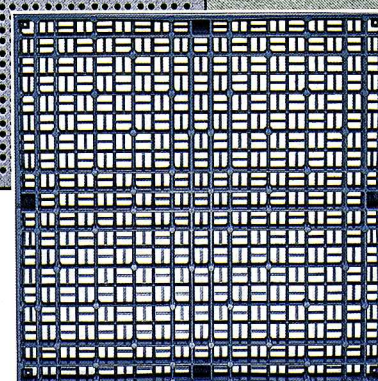

Grating Panel With Epoxy Coating

Features


- In order to meet various needs of clean room, we can supply 18%, 20% and 25% open-ratio perforated panel or 40% and 48% open-ratio grating panel.
- Pedestal tube is designed with rib inside. Hence, 75cm high pedestal can reach 6,500kg axial loading to meet tendency of high loading.
- Double stringers are provided, not only which enhances earthquake-proof property, but also which bottom stringer is used as cable tray.
- Third stringer and its cable tray not only prevent magnetic disturbance but also manage wiring much flexibly.
- Outlet cover which wiring path is adjustable, beautiful and dignified. Its aperture is managed flexibly and easily, too.

Specification (Size: 600x600mm)

TYPE	SIZE	Concentrated Loading			Ultimated Loading		Remark
		Lb	N	kg	N	kg	
500	600x600x50	1250	4900	500	9800	1000	Perforated panel and grating panel are also available.
600	600x600x50	1320	5880	600	11760	1200	
700	600x600x50	1540	6860	700	13720	1400	
1000	600x600x55	2200	9800	1000	19600	2000	Size 600x600x50mm is available for all types of panels.
1200	600x600x55	2640	11760	1200	23520	2400	
1500	600x600x55	3300	14700	1500	29400	3000	





Clean Room




Double stringer system



Chamfer hole

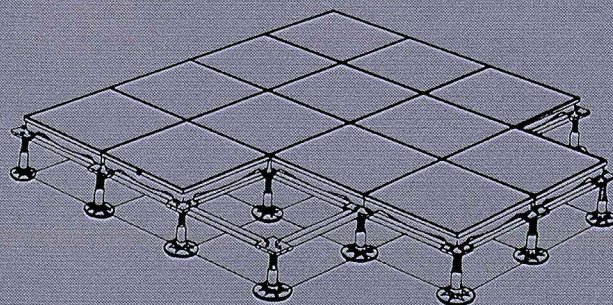

Corner lock




Damper


Perforated Panel / Grating Panel

Supply aluminum raised floor panel with epoxy coating, anodizing or nickel-chrome plating as you specially require

Ventilation

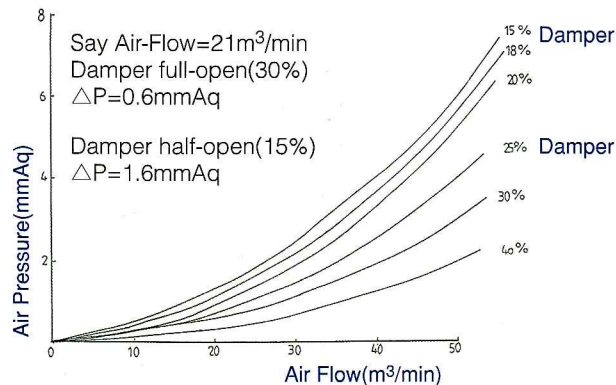


Ventilation

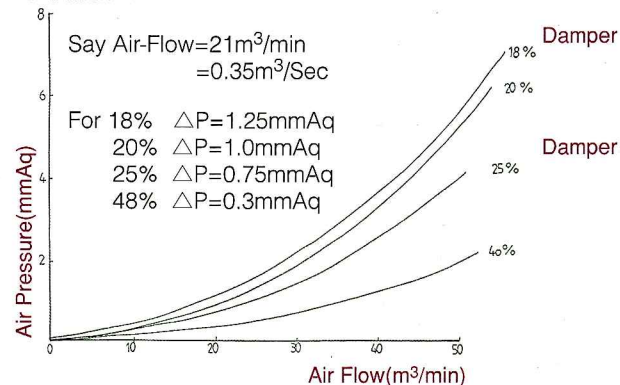


Pedestal


- **Features**
- Aluminum pedestal is die casting and meets requirements of CNS 10678 A2171
 - The level of aluminum raised floor panel is adjustable with aluminum threaded stud.
 - In computer room, F.F.H. is usually 200~450mm. However, F.F.H. is normally 450~750mm in clean room.
 - Pedestal is fixed with special adhesive. Expansion anchor may be added as required.

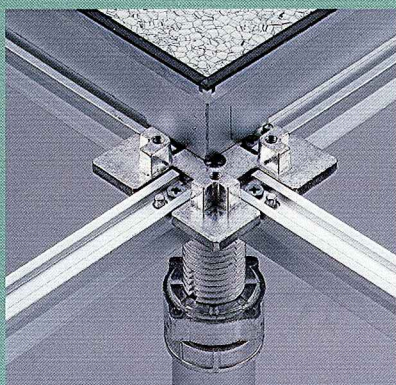


Screwed stringer on the pedestal is also available.

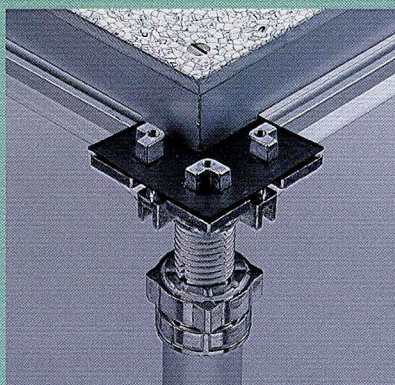


Inter Lock System

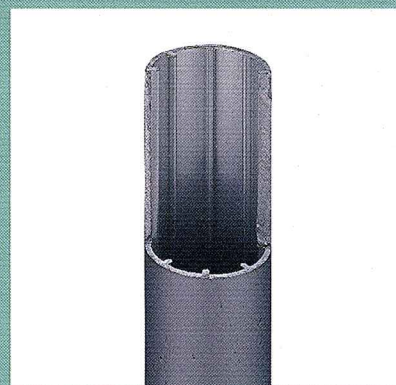

Rib in tube

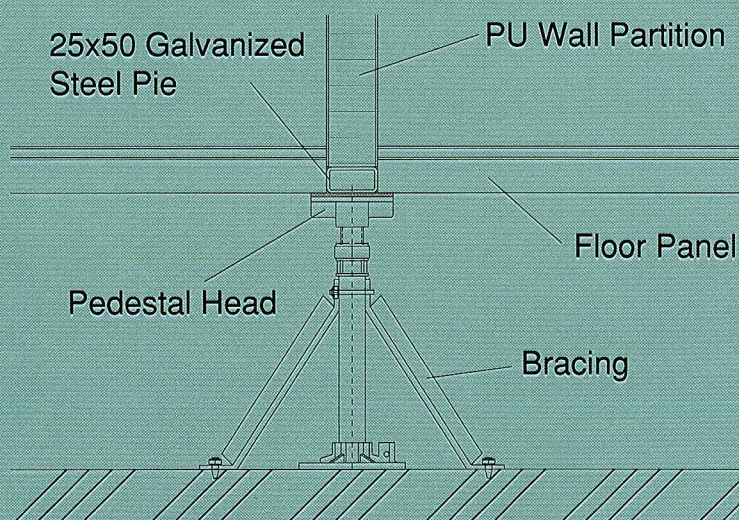



庫板與地板組合詳圖



Rubber Pad



Stringers Accessories



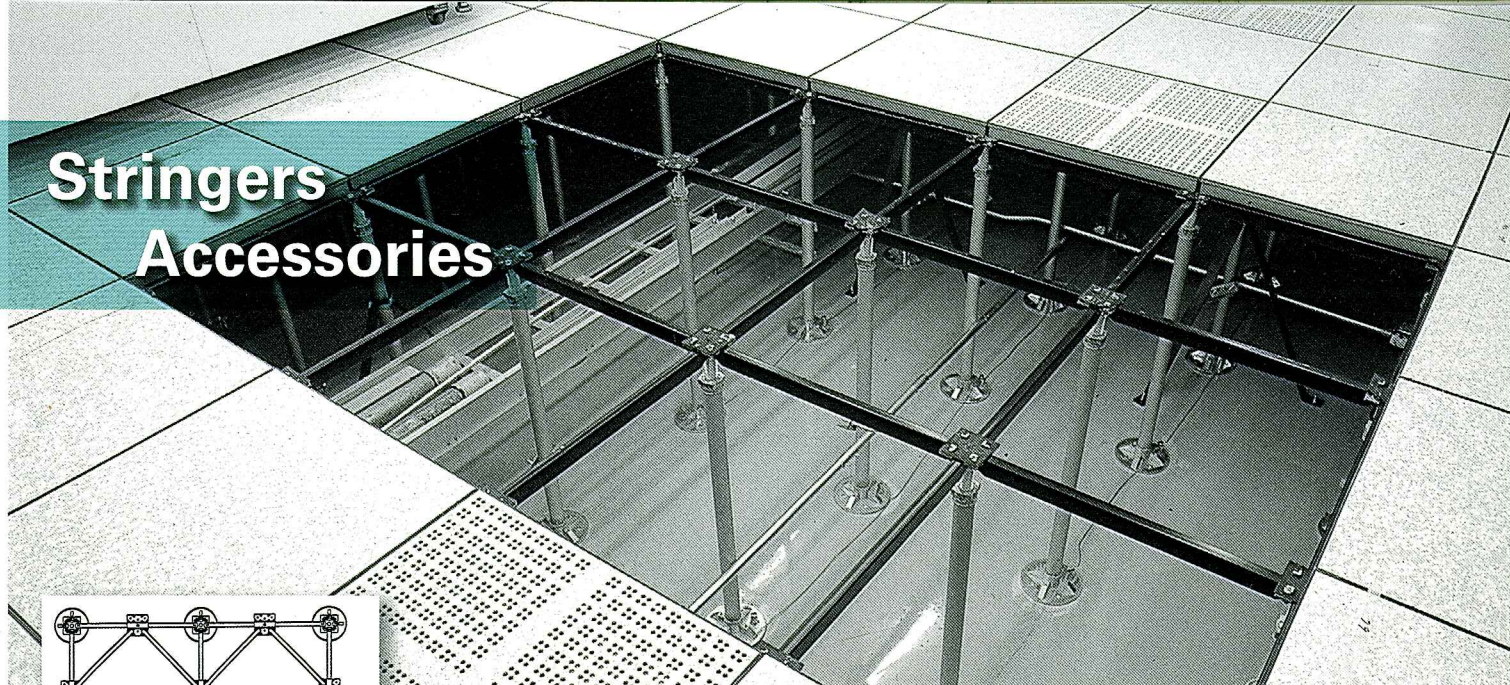


- Features**
- Aluminum stringer designed with special ridge can be installed firmly on aluminum pedestal head without screw.
 - Steel stringer is also available for different needs.


Accessories

Features

- Pedestals come with reserve wiring outlets for excellent grounding of steel grid structure.
- Slopes or steps may also be made available according to actual needs.
- A suction device is provided at the completion of each construction to facilitate removal of flooring when required.
- Wire outlets may be adjusted to fit existing outlets on factory floorings, and they are attractively designed, flexible and solve the problem of re-wiring.

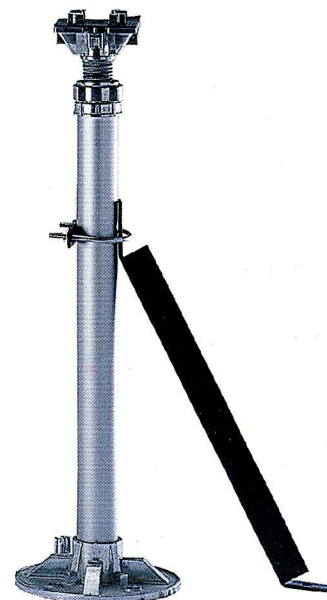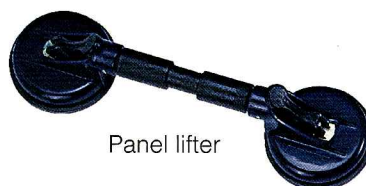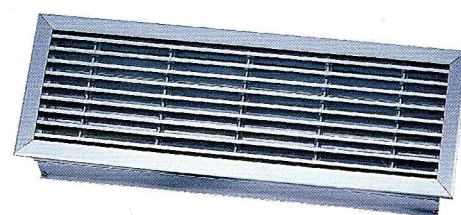

Bracing

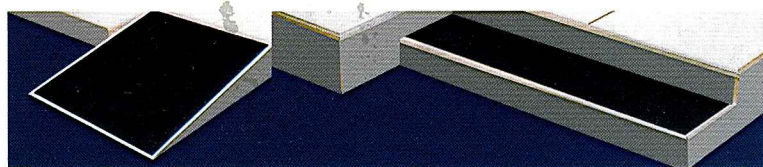



銀田金屬企業股份有限公司
LEVAFLOR INC.

台北市基隆路一段127號7F-3

Room 3, 7FL, No.127, Keelung Road, Section 1, Taipei, Taiwan.

TEL:886-2-27618640 FAX:886-2-27610194

E-mail:levaflor@ms24.hinet.net

<http://www.levaflor.com.tw>